





**TECHNI-SILENCE INC.**

## PANEL CORE

### Standard

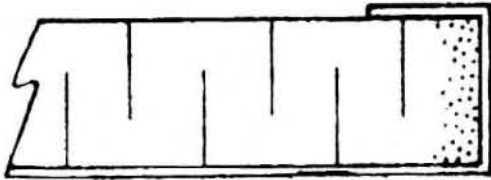


Panel 1" - 96 to 112 kg / m<sup>3</sup> (6 to 7lb. / ft<sup>3</sup>)

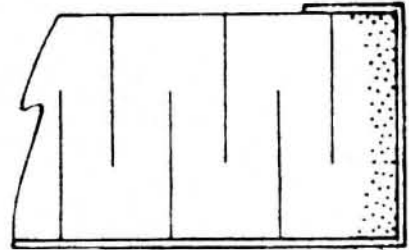


Panel 2" - 96 to 112 kg / m<sup>3</sup> (6 to 7lb. / ft<sup>3</sup>)

### High density impact

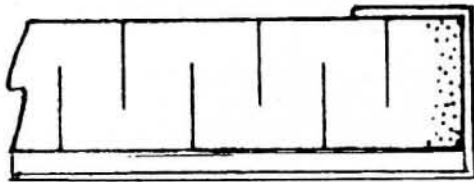

Panel 1" - 96 to 112 kg / m<sup>3</sup> (6 to 7lb. / ft<sup>3</sup>)  
+ 1/8" high density fiberglass  
bonded to face

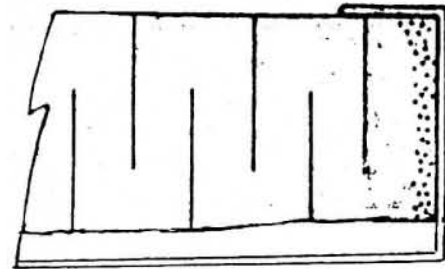

Panel 2" - 96 to 112 kg / m<sup>3</sup> (6 to 7lb. / ft<sup>3</sup>)  
+ 1/8 high density fiberglass  
bonded to face

## TACK BOARDS

### Materials:

**TECHNI-SILENCE** also offers fabric wrapped tack boards specially designed for today's office needs. These tack boards are manufactured from organic mineral fibers offering good dimensional stability, minimizing expansion and warp due to moisture. These tack boards are available in 1/2' thickness.

### Fabric:

**TECHNI-SILENCE** tack boards can be wrapped in most natural and synthetic fibers.

### Sizes:

**TECHNI-SILENCE** tack boards are available in custom sizes. The largest size available is 4' X 8'.